



TROX[®] TECHNIK

The art of handling air

Decentralised ventilation



Façade ventilation systems for new and refurbished offices, schools and children's daycare facilities



► The art of handling air ►►

Façade ventilation systems


TROX façade ventilation systems are used for the controlled ventilation of internal spaces. Specifically, they control or limit the outdoor air flow rate. A wide spectrum of functions, such as filtration of the outdoor air, heat recovery and thermal treatment, help to provide maximum comfort, while energy requirements are quite reasonable.

Customers can choose between stand-alone units and integration with a central BMS. The units blend in perfectly with the architecture of each room or building, lending themselves to a plethora of applications for both new builds and refurbishments.

Ideal solutions for every façade

Façade ventilation units are available for installation under sills, or above and to the side of windows. Underfloor units are usually installed in a raised floor, ceiling units in false ceilings, but in any case near an external wall. Underfloor units, ceiling units and vertical units for installation next to a window are ideal for rooms with floor to ceiling glazing.

All façade ventilation solutions at a glance

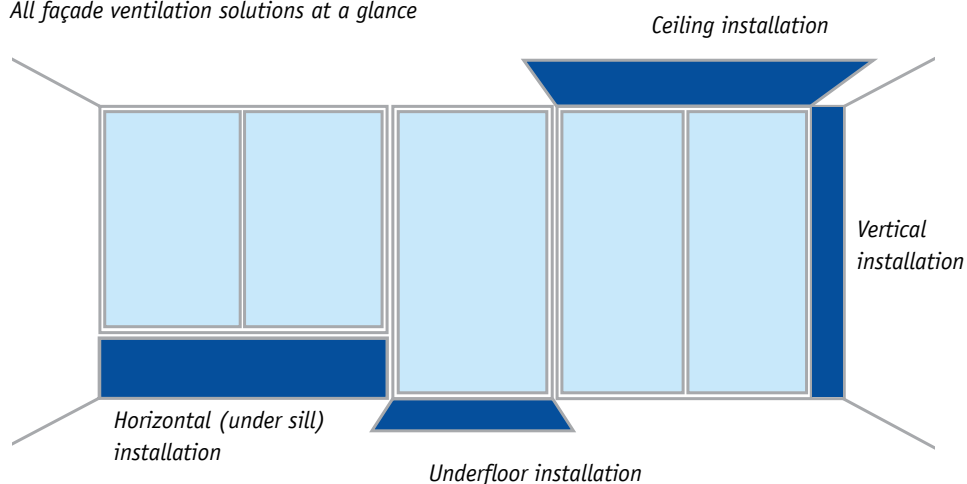

Outstanding comfort, high efficiency, low operating costs

- Acoustically optimised EC fan with low specific fan powers, SFP = 1 according to EN 13779
- Heat exchanger for heating and cooling, as a 2-pipe system, 2-pipe change over system or 4-pipe system
- Reduced fine dust and pollen contamination due to integral filters that conform to VDI 6022; long filter life
- Easy filter change, no tools required
- Motorised shut-off dampers, power off to close
- Self-powered secondary air damper for adding secondary air to increase the thermal output
- Energy efficiency class A to ErP 1254/2014

Optional equipment and accessories





- Modular control system FSL-CONTROL II, specially for decentralised ventilation systems
- Various room control panels in attractive designs
- Various wall and floor fixing systems
- Condensate drip tray with or without condensate drain
- Powder coating in many different colours, e.g. RAL CLASSIC

Save on installation costs:

- Reduced slab to slab height
- Minimal area requirement for technical equipment
- No ducts or shafts required
- Small unit base, hence only small floor area required
- Reduced installation time
- Clear interfaces


Save on operating costs:

- Low energy requirement for air transport
- Demand-based room air quality control
- Ventilation and air conditioning based on occupancy


	Page	
Horizontal (under sill) units	4-7	
Vertical units	8-11	
Ceiling units	12-15	
Underfloor units	16-19	
References	20-23	

HORIZONTAL (UNDER SILL) UNITS


SCHOOLAIR-B
FSL-B-ZAB/SEK
PROJECT SOLUTIONS



Standard concrete or brick façade with casement windows



Curtain wall façade



Multi function façade

Horizontal units are particularly suitable for standard brick or concrete façades with casement windows, but also for non-brick or non-concrete sills

The ready-to-use, decentralised SCHOOLAIR-B and FSL-B units provide comfortable room heating and demand-based ventilation. They create an inducing displacement flow and use pumped hot water and pumped chilled water for heating and cooling.



SCHOOLAIR-B

- Large air volumes as particularly required in schools, children's daycare facilities and meeting rooms
- Additional secondary air operation
- F7 secondary air filter
- Highly efficient heat recovery
- Demand-based ventilation
- Different constructions
- Heating and cooling
- Meets the requirements of ErP directive 1253/2014


FSL-B-ZAB/SEK

- Ideal for offices
- Additional secondary air operation
- Demand-based ventilation
- Compact size
- Energy efficiency class A to ErP 1254/2014

Project solutions


The following variants have already been successfully used for various projects:

- FSL-B-SEK (secondary air only)
- FSL-B-ZUL (supply air only)
- FSL-B-ZUS (supply air + additional secondary air)
- FSL-B-ZAS (supply and extract air + additional secondary air)




		SCHOOLAIR-B	SCHOOLAIR-B-HE	FSL-B-ZAB/SEK
Dimensions B x H x T	[mm]	1590 x 646 x 420	2090 x 750 x 420	1085 x 630 x 320
Volume flow rate range	[m ³ /h]	150 – 320	150 – 400	60 – 150
Total heating capacity up to	[W]	5800	6500	2400
Heating capacity per room up to	[W]	1700	1400	800
Total cooling capacity up to	[W]	1400	1750	700
Cooling capacity per room up to	[W]	800	1000	330
Outdoor air filter		F7	F7	F7
Extract air filter		G3	G3	G3

Horizontal (under sill) unit as seen from outside the building

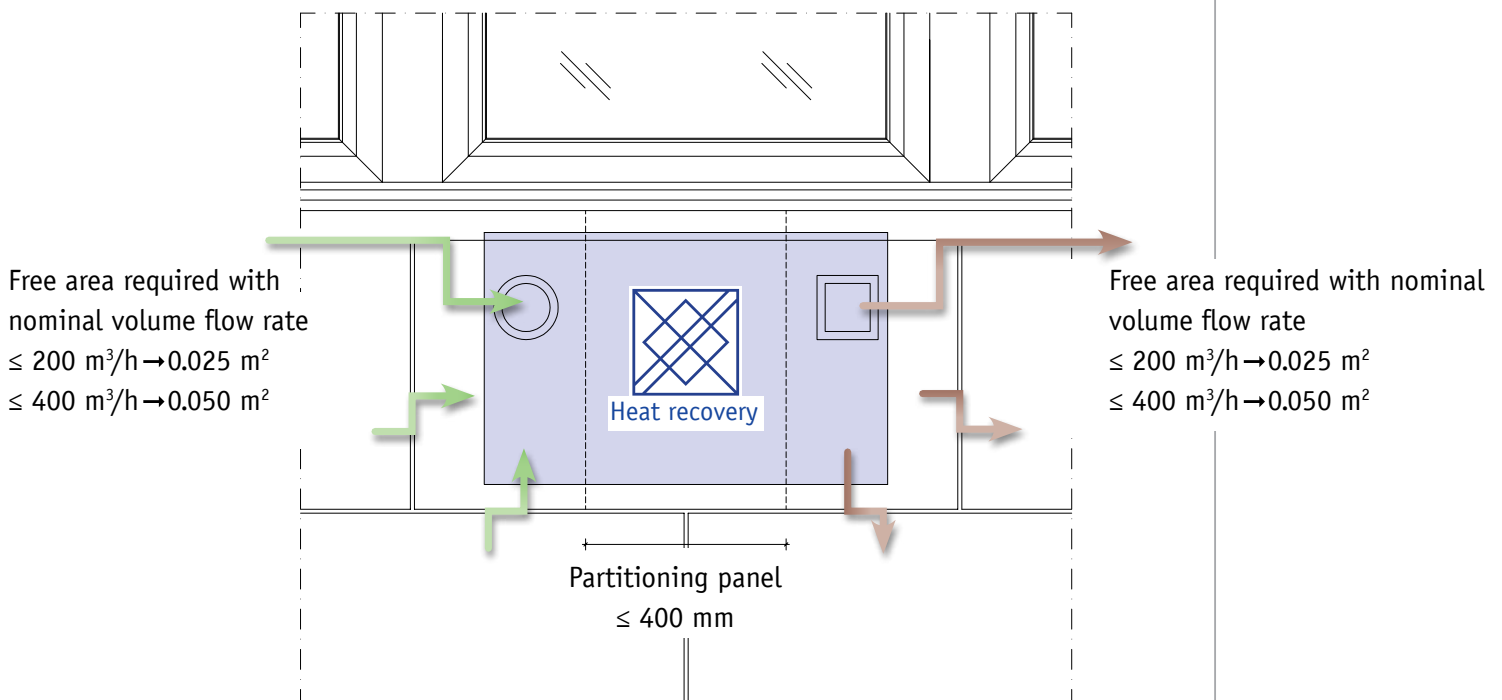

**Special requirements?
Give us a call!
We have solutions!**

Under sill unit, horizontal section

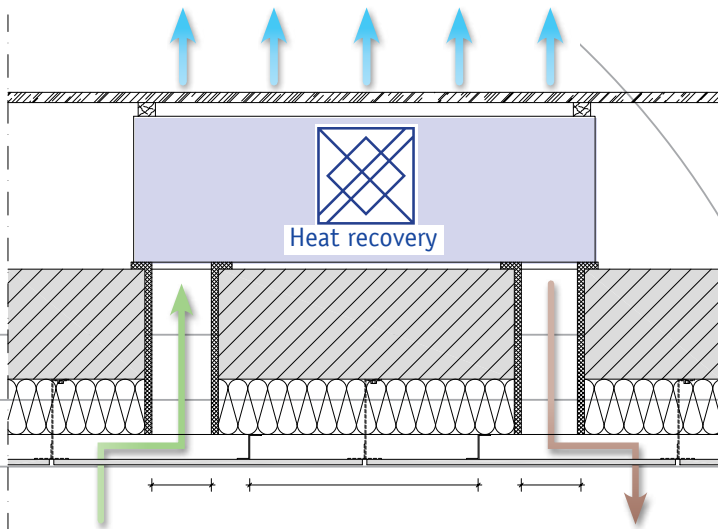




$\geq \varnothing 125 \text{ mm}$ or
 $\geq \varnothing 200 \text{ mm}$

Partitioning
 panel
 $\geq 400 \text{ mm}$

$\geq \varnothing 125 \text{ mm}$ or
 $\geq \varnothing 200 \text{ mm}$

Under sill unit, vertical section

Free area required with
 nominal volume flow rate
 $\leq 200 \text{ m}^3/\text{h} \rightarrow 0.08 \text{ m}^2$
 $\leq 400 \text{ m}^3/\text{h} \rightarrow 0.16 \text{ m}^2$

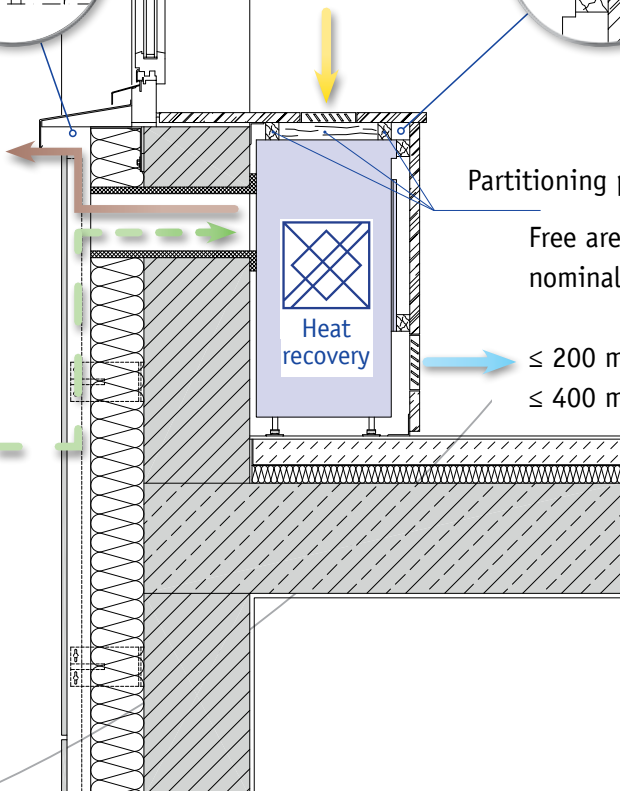


Partitioning panel

Free area required with
nominal volume flow rate


$\leq 200 \text{ m}^3/\text{h} \rightarrow 0.08 \text{ m}^2$
 $\leq 400 \text{ m}^3/\text{h} \rightarrow 0.16 \text{ m}^2$



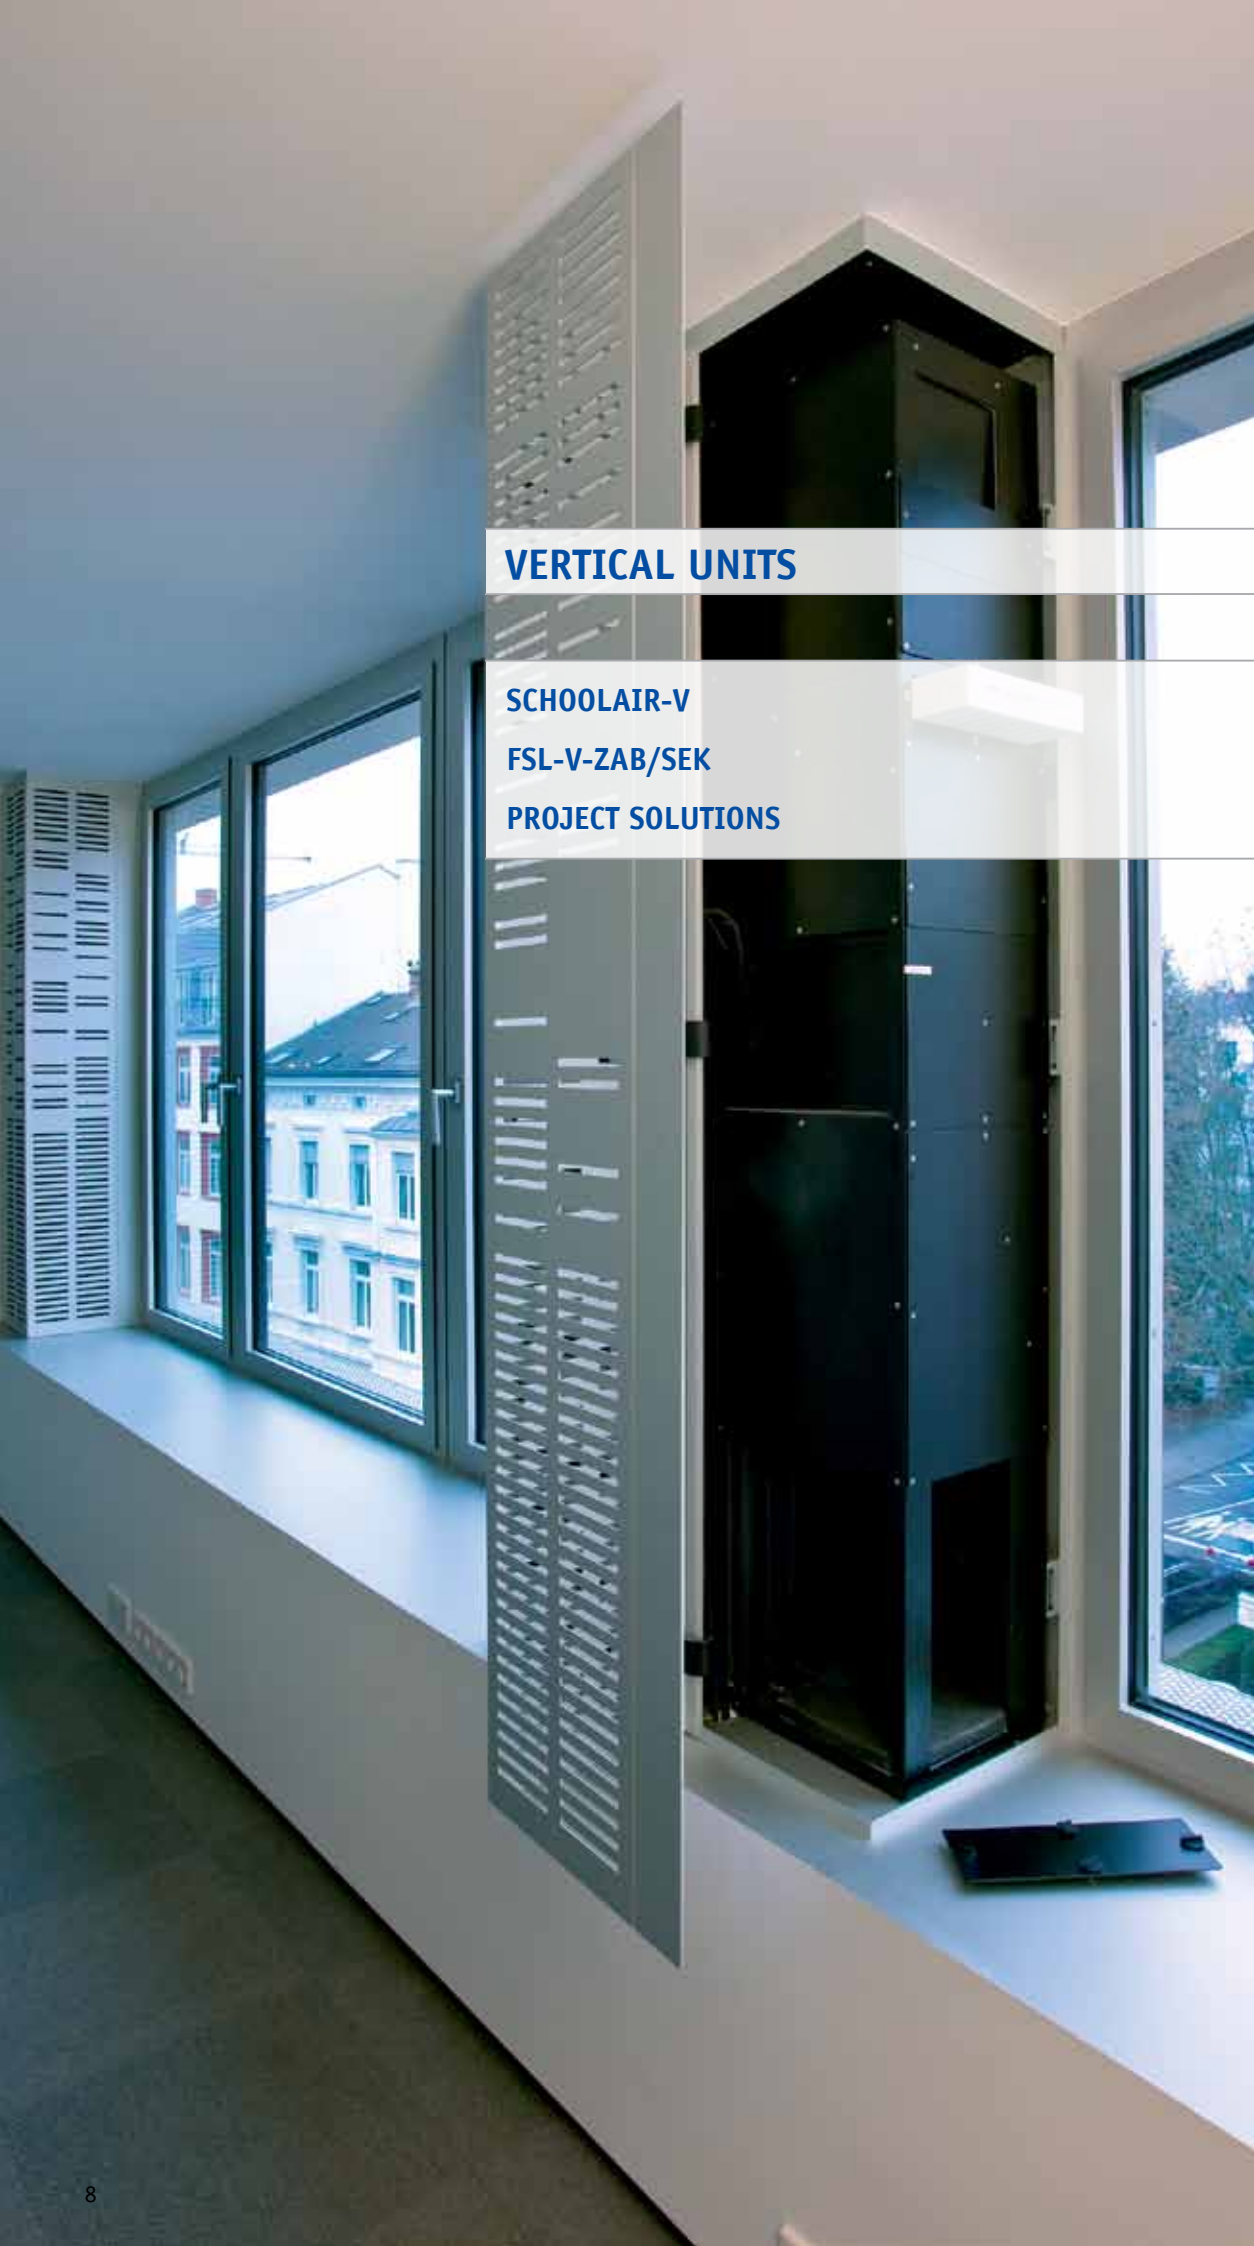


VERTICAL UNITS


SCHOOLAIR-V
FSL-V-ZAB/SEK
PROJECT SOLUTIONS




Standard concrete or brick façade with casement windows



Curtain wall façade



Floor to ceiling glazing

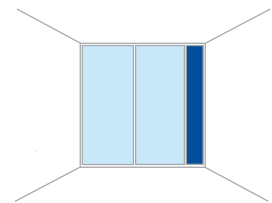

Multi function façade

Vertical units are suitable for standard brick or concrete walls with casement windows, for non-brick or non-concrete sills, and for curtain walls with floor to ceiling glazing

The ready-to-use, decentralised SCHOOLAIR-V and FSL-V units provide comfortable room heating and demand-based ventilation. They create an inducing displacement flow and use pumped hot water and pumped chilled water for heating and cooling.



SCHOOLAIR-V


- Large air volumes as particularly required in schools, children's daycare facilities and meeting rooms
- Additional secondary air operation
- Highly efficient heat recovery
- Available in different sizes
- Heating and cooling
- Meets the requirements of ErP directive 1253/2014

FSL-V-ZAB/SEK

- *The* solution for offices
- Additional secondary air operation
- Slim design
- Demand-based ventilation
- Energy efficiency class A to ErP 1254/2014
- Heating and cooling


Project solutions

Variant FSL-V-ZUS (supply and secondary air) has already been successfully installed.




	SCHOOLAIR V-2L	SCHOOLAIR V-4L	SCHOOLAIR V-1800	SCHOOLAIR V-HE	SCHOOLAIR V-HV	FSL-V ZAB/SEK
Dimensions [mm] B x H x T	397 x 2160 x 359	397 x 2350 x 359	600 x 1800 x 359	600 x 2000 x 408	600 x 2200 x 408	400 x 1800 x 320
Volume flow rate range [m³/h]	150 – 320	150 – 320	150 – 350	150 – 360	200 – 550	60 – 150
Total heating capacity [W] up to	5800	5760	5630	6020	4780	2860
Room heating capacity [W] up to	1422	1680	1005	900	3300	880
Total cooling capacity [W] up to	-	1440	1590	1685	1750	720
Room cooling capacity [W] up to	-	850	935	965	1470	450
Outdoor air filter	F7	F7	F7	F7	F7	F7
Extract air filter	G3	G3	G3	G3	G3	G3

Vertical unit as seen from outside the building

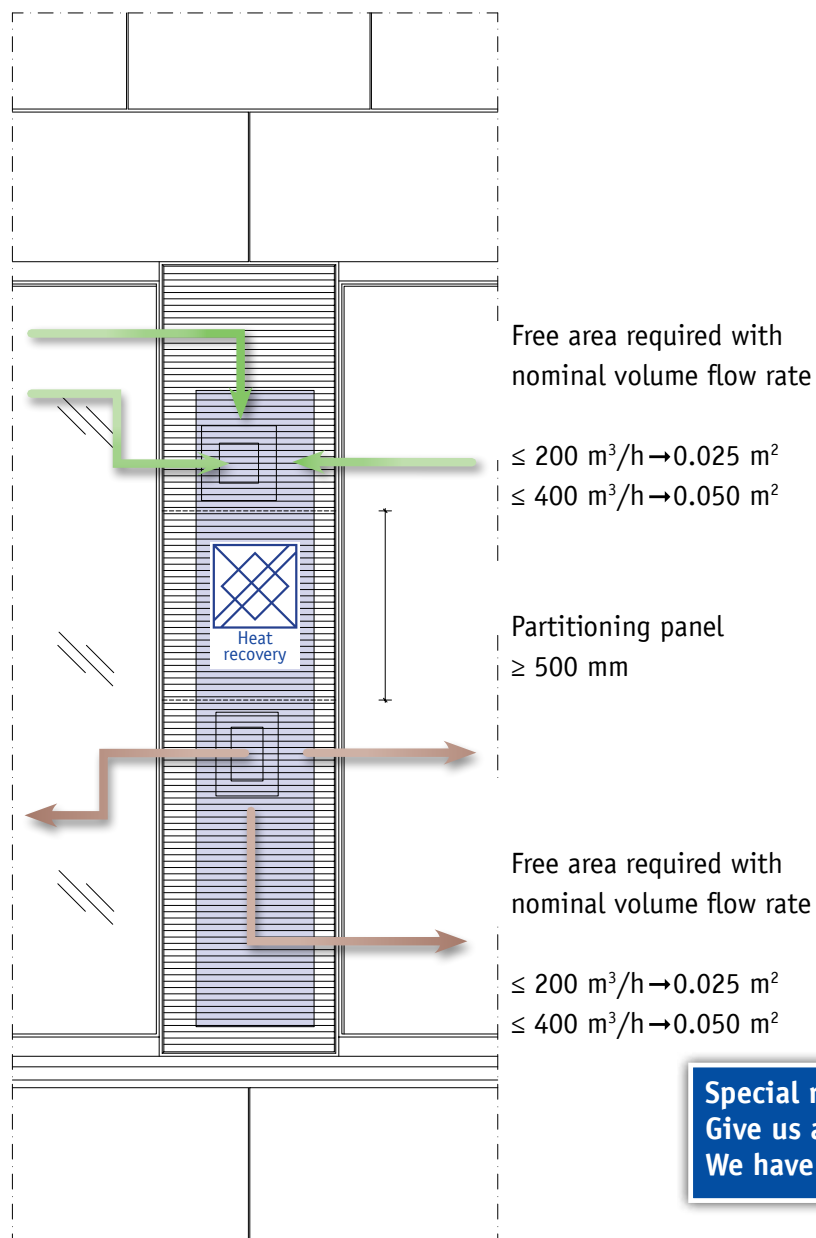


**Special requirements?
Give us a call!
We have solutions!**

Vertical unit, horizontal section

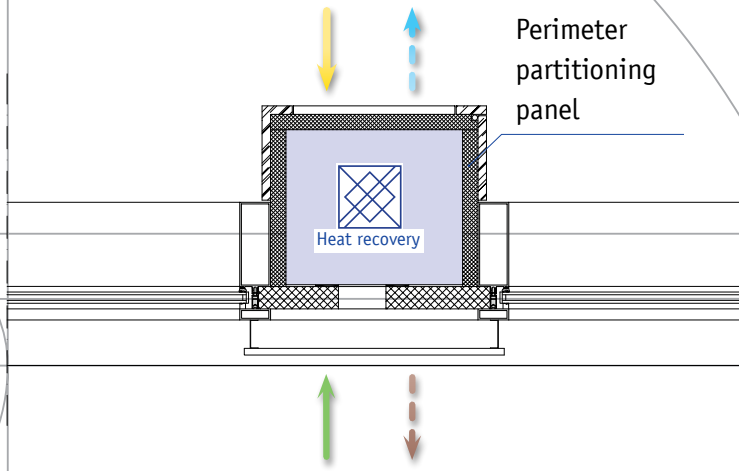


Vertical unit, vertical section

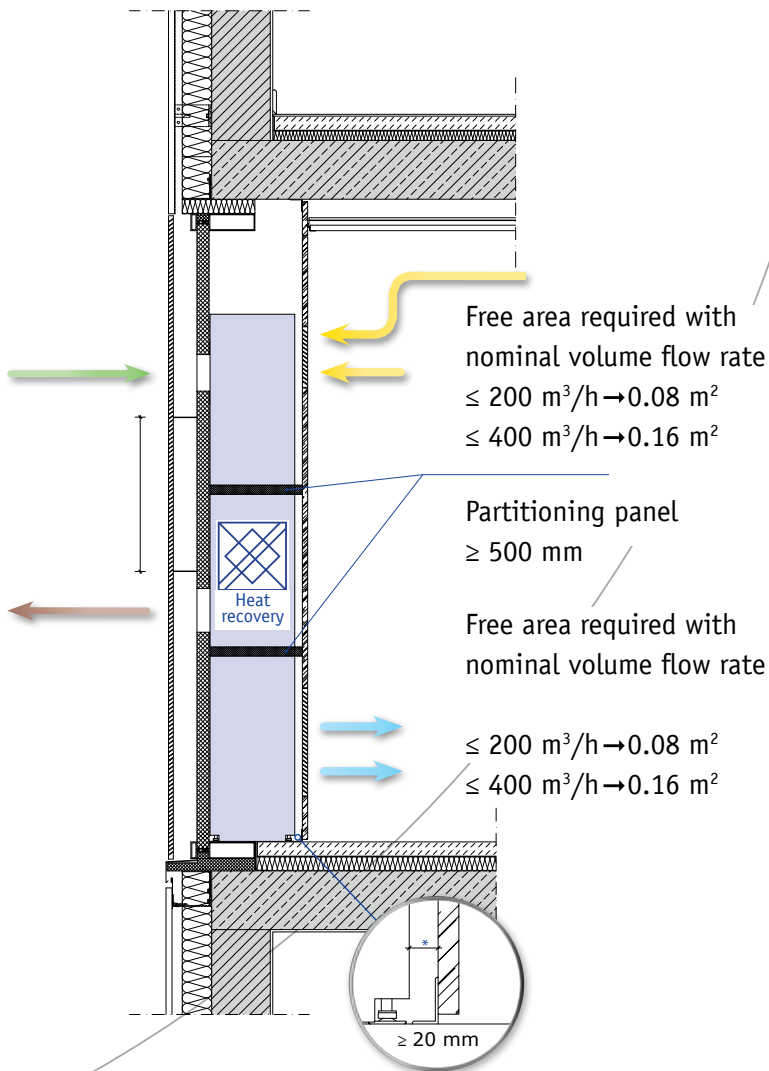




CEILING UNITS

SCHOOLAIR-D



Floor to ceiling glazing



Standard concrete or brick façade with casement windows

Ceiling units are suitable for standard brick or concrete façades with proper sills as well as for curtain wall façades with floor to ceiling glazing

The SCHOOLAIR-D units use water for heating and cooling, which is an energy-efficient solution; they are suitable for new buildings, refurbishment projects and revitalisation projects. Installation is below the ceiling slab and near an external wall. These units are specially recommended for rooms that require many air changes, such as classrooms, playrooms in children's daycare facilities or smaller meeting rooms in office buildings.



SCHOOLAIR-D


- Large air volumes as particularly required in schools, children's daycare facilities and meeting rooms
- Additional secondary air operation
- F7 secondary air filter
- Demand-based ventilation
- More architectural flexibility with regard to façades
- Heating and cooling
- Meets the requirements of ErP directive 1253/2014



		SCHOOLAIR-D-2L	SCHOOLAIR-D-4L
Dimensions B x H x T	[mm]	1690 x 400 x 800	1690 x 400 x 800
Volume flow rate range	[m ³ /h]	150 – 300	150 – 300
Total heating capacity up to	[W]	5720	5720
Heating capacity per room up to	[W]	1530	1530
Total cooling capacity up to	[W]	-	1350
Cooling capacity per room up to	[W]	-	800
Outdoor air filter		F7	F7
Extract air filter		✓	✓


Ceiling unit as seen from outside the building

Free area required
with nominal volume
flow rate
 $\leq 200 \text{ m}^3/\text{h} \rightarrow 0.025 \text{ m}^2$
 $\leq 400 \text{ m}^3/\text{h} \rightarrow 0.050 \text{ m}^2$

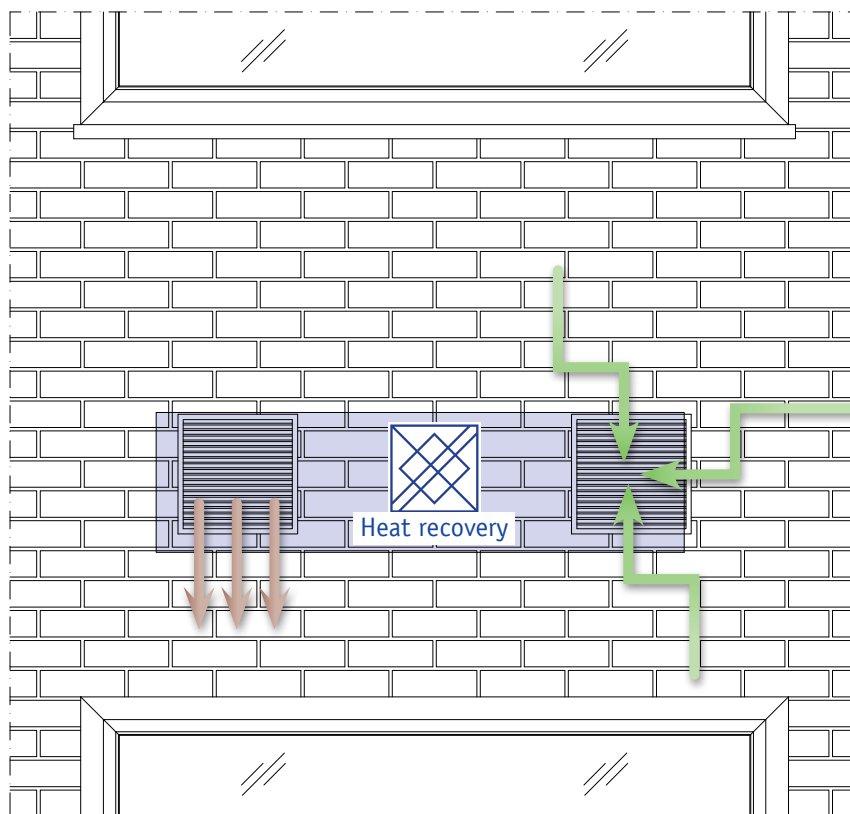


Free area required
with nominal volume
flow rate
 $\leq 200 \text{ m}^3/\text{h} \rightarrow 0.025 \text{ m}^2$
 $\leq 400 \text{ m}^3/\text{h} \rightarrow 0.050 \text{ m}^2$

Ceiling unit, horizontal section

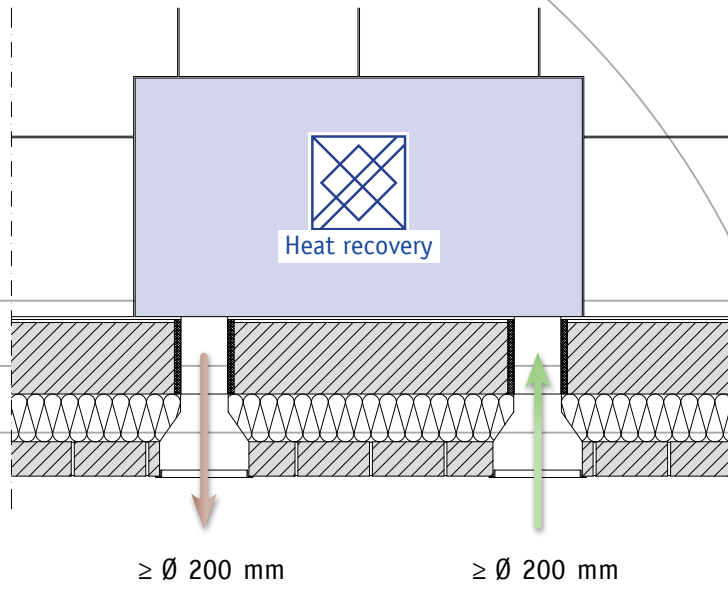

Ceiling unit, vertical section

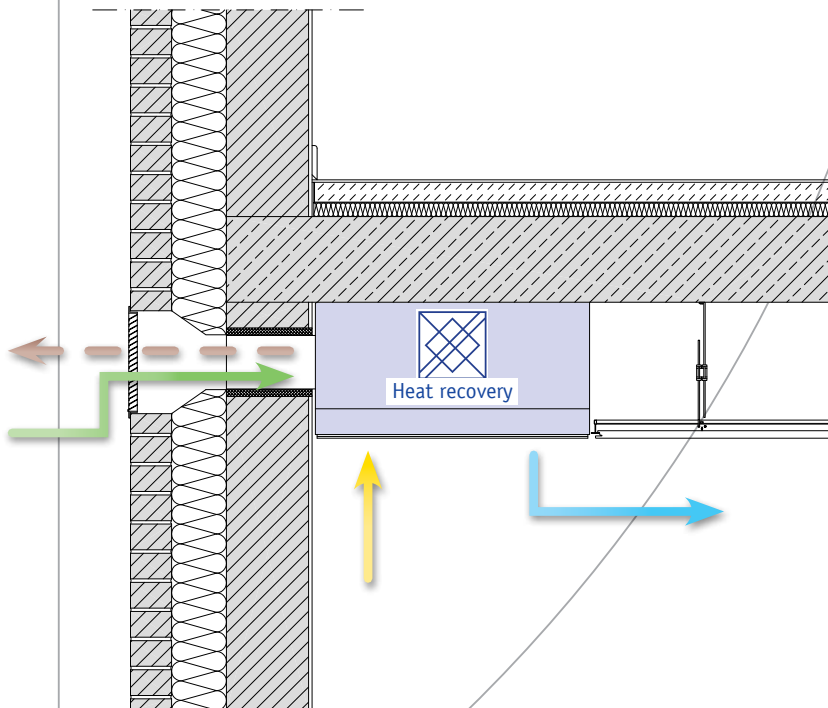


Special requirements?
Give us a call!
We have solutions!





UNDERFLOOR UNITS

FSL-U-ZAS



Floor to ceiling glazing


Underfloor units are ideal for rooms with floor to ceiling glazing and for rooms with a low ceiling

Supply air discharge near an external wall prevents a drop in the room air temperature near that wall when outdoor temperatures are low; similarly, it minimises the effect of solar gain in summer. Underfloor units are unobtrusive components. Air is supplied to and extracted from rooms through single grilles or roll down grilles.




FSL-U-ZAS

- Ideal for offices
- More architectural flexibility with regard to façades
- Heating and cooling
- Additional secondary air operation for the dissipation of increased thermal loads
- Heat recovery all year round
- Condensation-free operation
- Easy and quick inspection and maintenance through the grille (no inspection access panels required)



		FSL-U-ZAS
Dimensions	[mm]	B: 1100 – 1500 H: 150 (floor void) H: 196 – 300 (visible part with grille) T: 830
Volume flow rate range	[m ³ /h]	60 – 120
Total heating capacity up to	[W]	1100
Heating capacity per room up to	[W]	525
Total cooling capacity up to	[W]	377
Cooling capacity per room up to	[W]	280
Outdoor air filter		F7
Extract air filter		G3


Underfloor unit as seen from outside the building

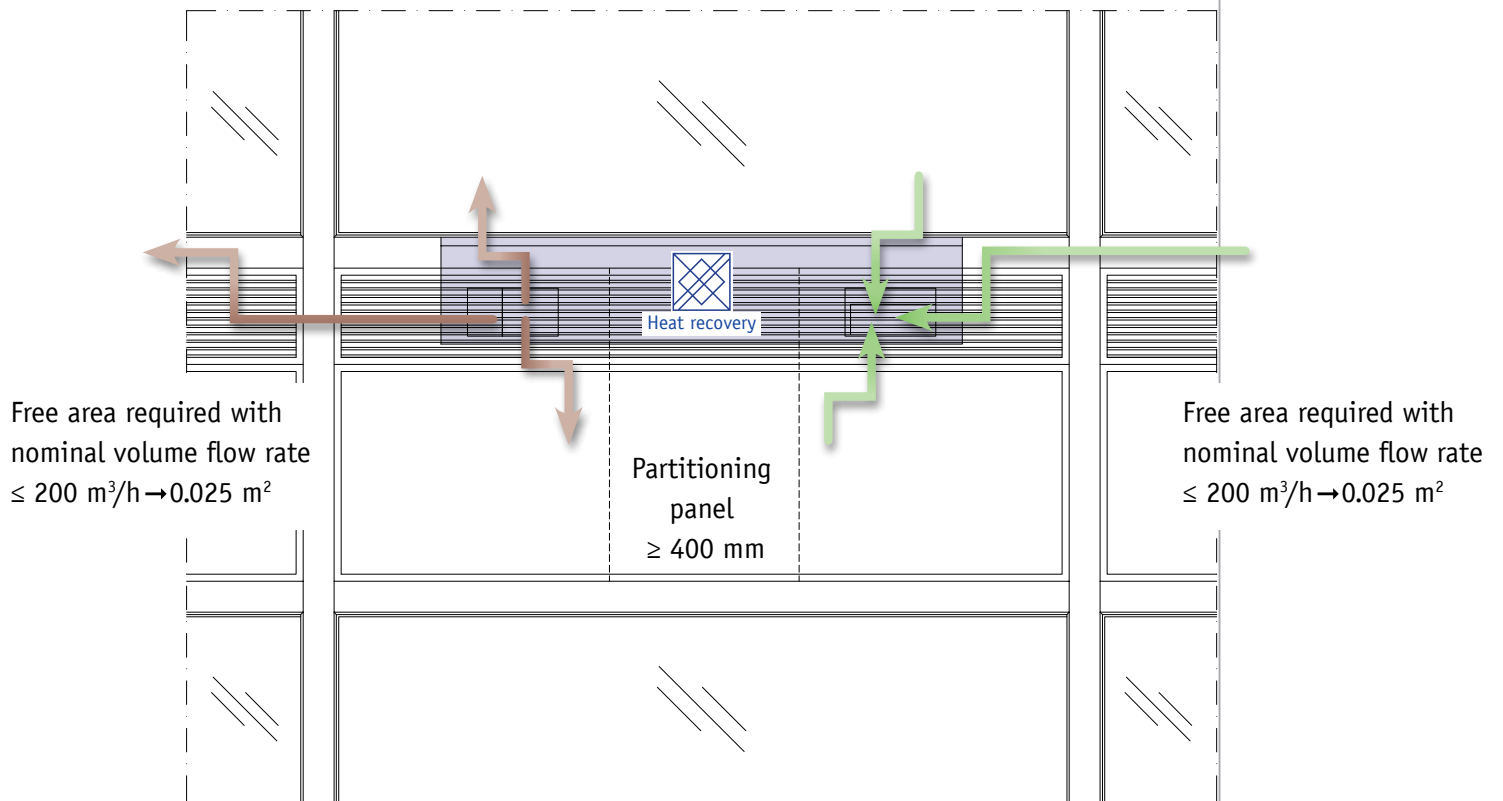


Underfloor unit, vertical section

Free area required with nominal volume flow rate $\leq 150 \text{ m}^3/\text{h} \rightarrow 0.06 \text{ m}^2$

Free grille area at least 55%

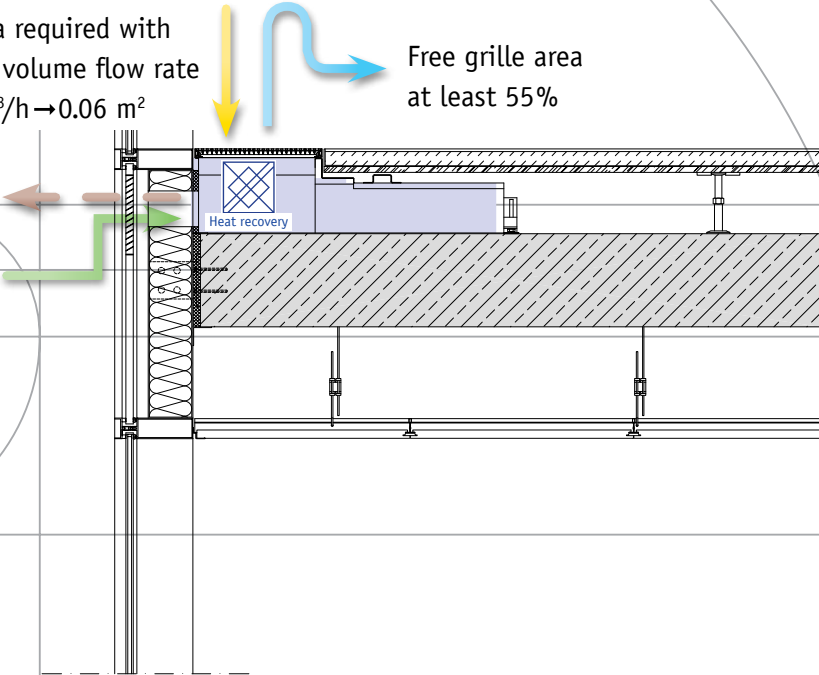

Underfloor unit, horizontal section

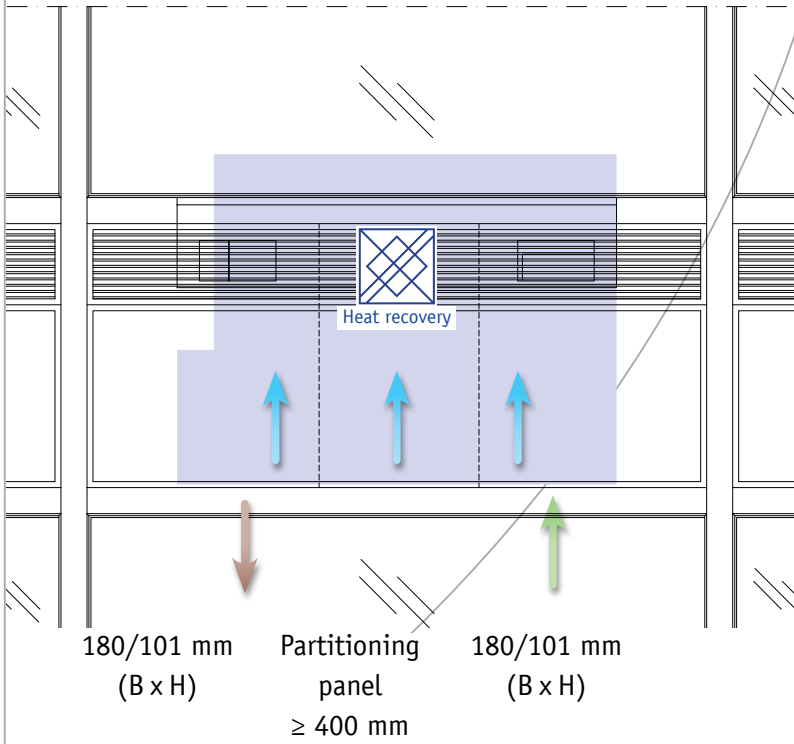

Special requirements?
Give us a call!
We have solutions!





New Grammar School, Bochum




Imtech Building, Hamburg



Capicorn, Düsseldorf



Feldbergstraße office building, Frankfurt

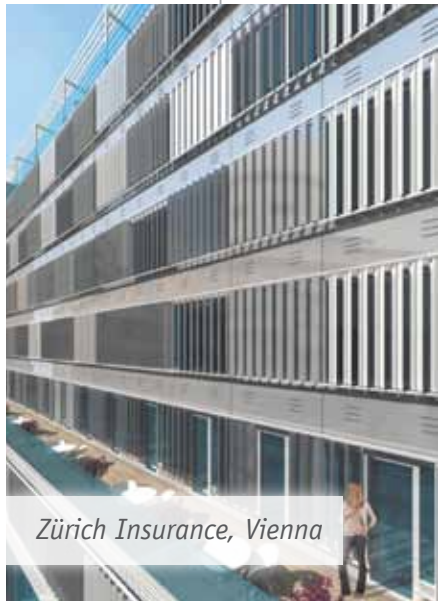

Zürich Insurance, Vienna



Franziska Hager School, Prien



ExpoCenter, Berlin



Wildauer Platz office building, Aachen



Bayer, Leverkusen



E.ON Energy Research Centre at RWTH University, Aachen



Thuringia Insurance, Munich



Laimer Würfel building, Munich



DEG head office, Cologne



Post Tower, Bonn



BSZ, Dresden



Wendelstein Grammar School, Wendelstein



Kennedy Tower, Düsseldorf



Wilhelm Mayer

System Technology Manager
Mobile +49(0)1728012125
w.mayer@trox.de



Helmut Ludwig

Sales, Northern Germany
Mobile +49(0)1728012090
h.ludwig@trox.de



Klaus-Dieter Wolf

Sales, Southern Germany
Mobile +49(0)1728012168
k.wolf@trox.de

TROX[®] TECHNİK
The art of handling air

TROX GmbH
Heinrich-Trox-Platz
47504 Neukirchen-Vluyn
Germany
Phone +49 (0) 2845 2020
Fax +49 (0) 2845 202265
www.troxtechnik.com
trox@trox.de